

SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

Key Features

- Core to core alignment
- 7s fast splicing, 18s highly efficient heating
- 10000 groups of fusion records storage
- At least 220 counts of splicing and heating cycles
- Dust-resistant, water-resistant, shock-resistant
- USB and SD card interface, auto update of U disk
- Ceramic presser foot, ceramic V-groove, all-in-one fixture
- Dual-directional fusing, auto fusing, intelligent heat shrink
- 300 groups of splice modes, 100 groups of heating modes
- 320 times image magnification, 5mm fusing for ultra-short cleave length
- GUI (graphical user interface) and touch screen, convenient for operation

Typical Applications

- FTTx
- Metro
- Data center
- Optical assembly
- Fiber optic components



SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

Features To Boost Your Efficiency

- ◆ Water-resistant, dust-resistant, shock-resistant, greater environment adaptability



Shock-resistant



Rain-resistant



Dust-resistant




Water-resistant



High-temp-resistant

- ◆ All-in-one fixer (optional splice-on connector for SFS-2000H)

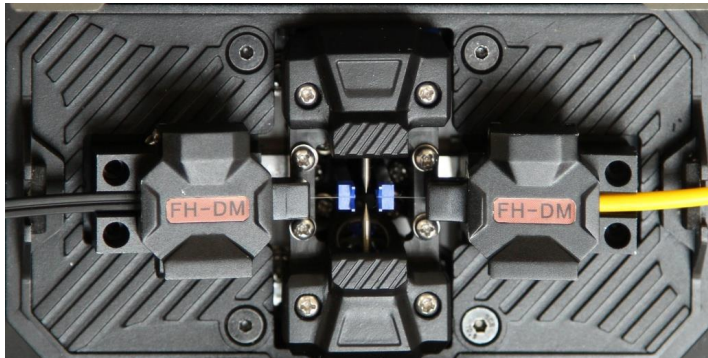

- ◆ Graphical interfaces and touch screen




SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

◆ Intelligent heat shrink



◆ Ceramic V-groove and ceramic presser foot

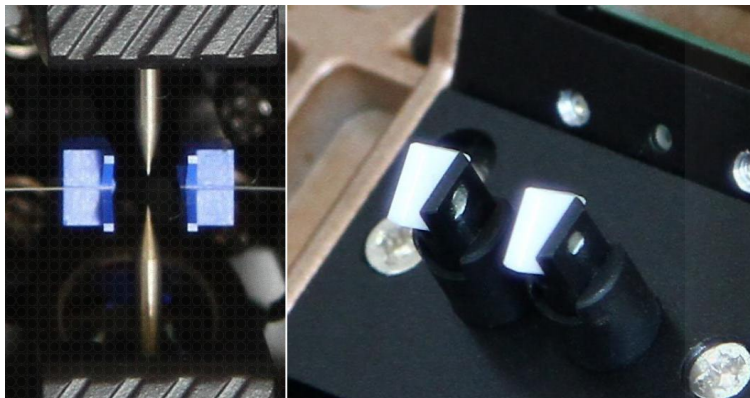

◆ Multi-functional carrying case (Standard Package)



No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109
sales@salukitec.com www.salukitec.com

SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

Technical Specifications

Model	SFS-2000H	SFS-2000
Motor qty.	6	4
Alignment method	Precise core alignment, cladding alignment, manual alignment	Cladding alignment, manual alignment
Applicable fibers	SMF (G.652), BIF(G.657), MMF (G.651), DSF (G.653), NZDSF (G.655)	
Typical Splice loss	0.02dB (SMF/BIF), 0.01dB (MMF), 0.04dB (DSF), 0.04dB (NZDSF)	0.03dB (SMF/BIF), 0.02dB (MMF), 0.04dB (DSF), 0.04dB (NZDSF)
Optical fiber diameter	Cladding: 80 - 150 μ m, coating layer: 0.1 - 3mm	
Cleave length	5 - 16mm (coated optical fiber diameter \leq 250 μ m) 10mm (coated optical fiber diameter: 0.25 - 3mm)	
Return loss	Better than 60dB	
Attenuation value accuracy	0.01dB	
Splicing time (typical)	7s (Fast mode)	
Heating time (typical)	18s	
Tension	1.96 - 2.25N	
Protection sleeve	60mm, 40mm and a series of protection sleeves	
Graphical display	High-performance 4.3 inch LCD	
Magnification time	320 times / 88 times, 700 times	320 times / 88 times
Fusion records	10000 groups / 64 images	10000 groups
Max. power consumption	55W	
Battery capacity	11.1V, 6800mAh	
Battery operation time	Min. 4 hours, battery indicator in display	
Battery service life	Cycle charging: 300 - 500 counts, can be replaced by customers	
Electrode service life	Typical: 4000 counts, can be replaced by customers	
Construction lighting	Built-in lights with high-brightness and wide lighting area	
No. of splice/heating per battery full charge	>220 cycles	
Resistance features	Shock: 60cm all surface drop, Rain: H=3mm/min for 10min, IPX2 Dust: Exposure to dust (0.1 to 500 μ m dia Alumina Silicate), IP5X	

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109

sales@salukitec.com www.salukitec.com



SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

General Information

Model	SFS-2000H	SFS-2000
Working environment	Altitude: 0 to 6000m above sea level Humidity: 0 to 95%RH, non-dew Temperature:-10 to 50°C Wind:15m/sec*4	
Operation interfaces	GUI (graphical user interfaces)	
External power	AC: 100 - 240V, 60Hz, 0 - 1.5A DC: 10 - 15V	
Port	USB / SD	
Dimensions	120mm ×130mm×154mm (WxHxD) (without rubber anti-vibration pad)	
Weight	1.8kg (without battery), 2.1kg (with battery)	1.65kg (without battery), 1.95kg (with battery)

Standard Package

No.	Description	Qty.
1	Fusion splicer	1 PC
2	AC power cord	1 PC
3	AC adapter	1 PC
4	Jacket stripper	1 PC
5	Drop cable stripper	1 PC
6	S33012 fiber cleaver	1 PC
7	Spare electrode	1 PAIR
8	Cooling tray	1 PC
9	Cleanup set	1 SET
10	Instruction manual	1 PC
11	Multi-functional carrying case	1 PC

No.367, Fuxing N. Rd., 105 Taipei, Taiwan Tel: +886 909 602 109

Note: Information will conduct the necessary updates, the contents of this document are subject to change without notice.
sales@salukitec.com www.salukitec.com



SFS-2000 Series Optical Fiber Fusion Splicer

Core-to-core / Touch Screen / 7" Fast Splicing / Water & Dust Resistant

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109
sales@salukitec.com www.salukitec.com

